9 Series

Crawler Excavators

DX230LC-9

Operating weight: 23 600 kg

Engine power: 141 kW / 189.1 hp

Bucket capacity: 1.2 m³

DX260LC-9

Operating weight: 26 300 kg

Engine power: 171.1 kW / 229.4 hp

Bucket capacity: 1.4 m³





DEVELON

Since 1937, Develon continues to innovate, driving change in construction equipment as South Korea's leading brand.

Bolo

We push the limits of performance, safety, and user experience—delivering machines that don't just meet expectations but exceed them.

Smart

Our advanced technology and engineering expertise drive efficiency, productivity, and sustainability in every machine we build.

Collaborativ

By listening, adapting, and innovating alongside our customers and partners, we create solutions that move industries forward.

Develon: Powered by Innovation

With a bold vision, smart execution, and a collaborative spirit, Develon continues to lead the way — building the future, one breakthrough at a time.

We are Develon.

Develon is a bold name that reflects our core ambition to continue developing onwards and to make a positive mark on our world. Moving forward, we will continue providing innovative products and solutions that advance the world we live in today.



Achieve the Next

Break New Ground with Develon's 9 Series Crawler Excavators

The all-new Develon Crawler Excavators redefine productivity, safety, operator convenience, and versatility with cutting-edge design and smart technology. Ranging from 23 to 28 tons, they deliver superior lifting performance and efficiency while reducing fuel consumption. They also offer advanced safety features, including virtual fences and the Smart Around View Monitor.

Set the Pace for Unmatched Productivity

- Improved performance with up to a 20% increase in engine output and an 8% reduction in fuel consumption
- Breaker Assist and an onboard weighing system further enhance efficiency and precision

Smart Safety Features

- Smart Around View Monitor with object and human recognition
- Enhanced stability with heavier counterweight and Advanced Lift Assist
- Virtual Wall for secure operation in any environment
- E-Stop for automatic machine shutdown when an object or person is detected within 3 meters of the working zone

More Comfort and Convenience

- Spacious new cabin with a larger 12.8" display, an optional second display, a new full electronic joystick, improved lighting, and a Digital Key—maintaining one of the largest cabins on the market
- Advanced Assist Systems for streamlined operation
- Prognostic & Health Management to prevent failures and minimize machine downtime

Lower Ownership Costs

 Extended maintenance intervals – from 500 hours to 1000 hours – boost productivity and reduce long-term costs for Develon machines

1000 hours

120%

Increased Productivity

The new Develon DX05V engine (Stage V compliant) boosts productivity with its powerful performance, impressive operating weight, and class-leading digging and lifting capacities. Its auto-shut-off reduces idle time and wear, while the engine's advanced design enhancements increase productivity by 10% for the DX230LC-9 and 20% for the DX260LC-9—maximizing efficiency on every job.

↓8%

Reduced Fuel Consumption

The Full Electro Hydraulic Control (FEH) system—featuring electronic pumps, Main Control Valves (MCV), and Relief Control Valves (RCV)—helps save up to 1530 liters of fuel for the DX230LC-9 and 2 665 liters for the DX260LC-9 every 1500 hours of operation, making it easier on both your wallet and the environment.

Machine Efficiency

at its Best

With the new Develon DX05V engine and advanced FEH system, you'll get the best Develon has to offer —powerful performance, fuel savings, and reduced wear for maximum productivity and efficiency.



Safety That Goes the Extra Mile

Develon sets new safety standards with advanced technologies inspired by the car industry, bringing innovation and reliability to the construction sector. From the Smart Around View Monitor (SAVM), which provides a 360-degree view of the job site, to Advanced Lift Assist, which actively monitors lifting capacity and potential tipping hazards, these unique, market-leading features are designed to maximize operator safety and provide peace of mind, no matter how challenging the job site may be.



Protect What Matters

Develon machines put safety first, with smart features that keep you protected every step of the way. With improved stability, real-time hazard alerts, and intuitive features, you can feel confident and secure on the job.

Stay One Step Ahead

Smart Around View Monitor (SAVM)

- The Smart Around View Monitor (SAVM) is a market-leading system that uses six cameras, radar sensors, and Al-powered object detection to provide a full 360-degree view around the machine.
- Human Detection enhances safety by alerting operators with both visual and audible signals whenever a nearby person is detected.

E-Stop*


- The E-Stop feature enhances safety by controlling machine movement in high-risk areas. With upgraded radar sensors, it detects obstacles over a 330-degree range and up to 6 meters away.
- When the machine gets within 6 meters of an object, it gradually slows down, and if within 3 meters, it comes to a complete stop. The intuitive E-Stop sets a new safety standard in the construction equipment sector, keeping everyone on-site safe.



*Note: E-Stop feature may not be available during the initial months following commercial launch.

Set Your Boundaries

- Our Virtual Wall feature keeps operations safe by limiting the machine's movement to specific areas and reducing the chance of collisions.
- Ideal for tight urban spaces or underground sites with obstacles like wires and pipes, safety zones let operators work with confidence.
- Possible to set up the maximum height, maximum depth, maximum reach, and swing angles.

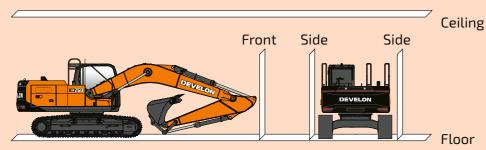

Rock-Solid Stability

Advanced Lift Assist

- Advanced Lift Assist improves operator safety by actively showing the machine's current lifting capacity and alerting operators to potential tipping hazards.
- This industry-first feature utilizes
 a lifting force table to highlight
 risk zones on the gauge panel
 during maneuvers and on inclines.
 Especially valuable for large
 companies with frequent operator
 machine changes, it ensures
 consistent safety across all
 equipment.

New Counterweight

 With the added weight of the heavier counterweight, the stability of our new DX260LC-9 excavators has been enhanced, making lifting heavy loads safer. This upgrade reduces the risk of tipping, allowing operators to work with greater confidence and ease.





Features may vary by region and model 17

Versatile, Smooth, and Ready

Develon machines are designed with operator comfort and efficiency in mind. Advanced features like 2D Machine Guidance, 2D MC Grade Assist, Fine Swing, and Intelligent Floating Boom Mode combine to provide a more comfortable, productive work experience, enabling operators to work faster, smarter, and with greater control.

2D Machine Guidance & 2D MC Grade Assist

Develon's 2D Machine Guidance and 2D MC Grade Assist systems are designed to make your job easier. These smart technologies provide precise guidance and grade control, helping you work with more accuracy and efficiency. By simplifying complex tasks, Develon machines allow you to get more done in less time, improving performance and reducing costs on the job site.


4 Work Modes & 4 Power Modes

The operator can easily optimize performance with these selectable modes:

- 4 Work Modes: 1-way, 2-way, Digging, and Lifting modes, each designed for specific tasks.
- Tilt Rotator Settings: Tailored for precision and minimizing back pressure during operation.
- 4 Power Modes: Eco, Standard, Power, and Power Plus, all featuring Smart Power Control to balance power and fuel efficiency.
- Intelligent Floating Boom Mode: Reduces vibration when using a breaker and ensures smooth, precise bucket movement for enhanced control and efficiency.

Fine Swing Function

The Fine Swing Function smooths out the swing motion, reducing shaking when starting or stopping. This makes the operation safer, preventing objects from falling off the excavator. It also ensures a smooth stop by controlling swing speed and eliminating jolts during direction changes.

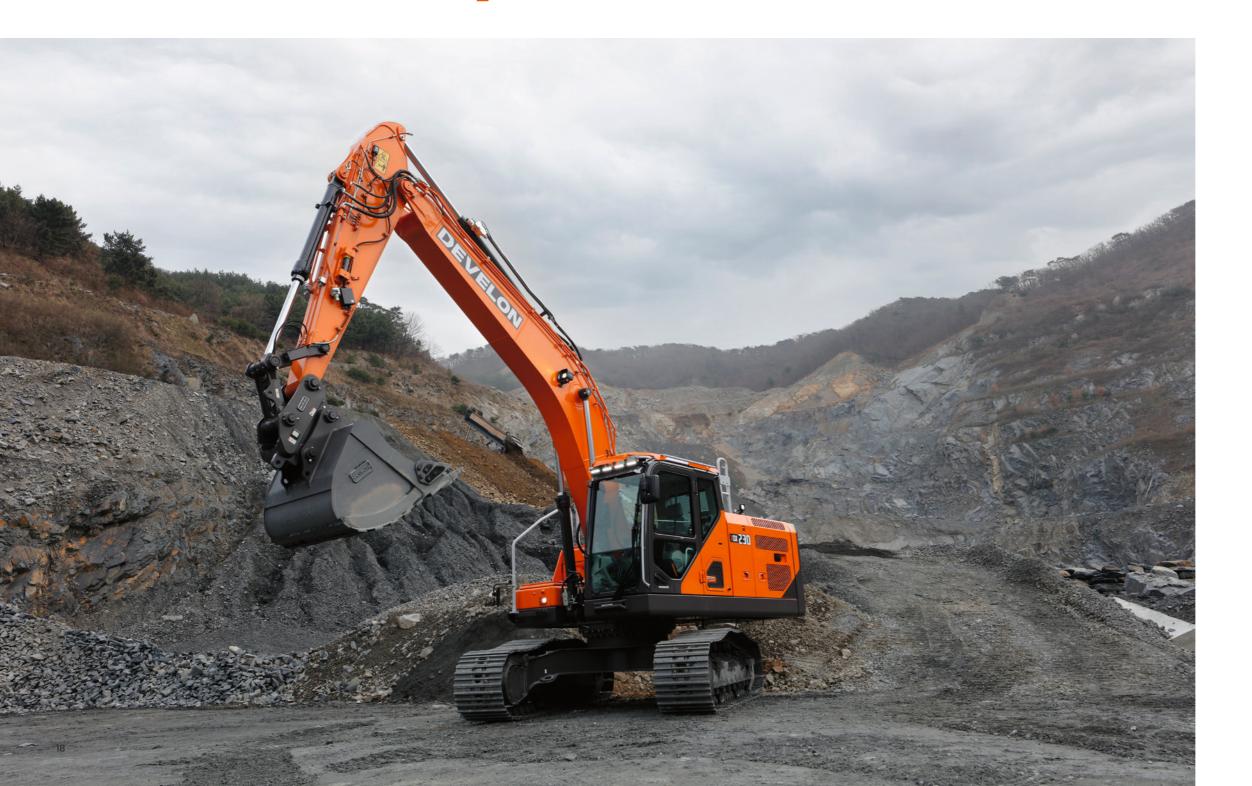



Conquer The Day with Comfort

The new cabin offers one of the most spacious and ergonomic environments in the industry, designed to maximize operator comfort and productivity. With a ROPS cabin that reduces vibrations, enhances safety, and increases overall efficiency, this design provides a truly convenient and comfortable experience for operators.

New Operator Compartment

- A spacious cabin offering excellent visibility and enhanced lighting, including ambient light, creates a comfortable environment for long shifts.
- With 10 color options available, operators can customize the atmosphere to suit their preferences, especially during late-night tasks. Plus, the lighting adjusts according to the selected work mode, providing intuitive task recognition without distractions.

12.8" High Resolution Monitor

- The large 12.8-inch high-resolution display provides operators with an engaging, easy-to-use interface to access machine information and manage various functions.
- Customizable to suit personal preferences, the screen allows operators to split it for improved multitasking. For enhanced efficiency, a dual monitor option is also available, enabling up to four screen splits to streamline workflow and boost operational performance.

New Joystick


- The newly designed joystick offers operators the ability to personalize controls for maximum comfort and ease. It enhances movement control with options like "Joystick Steer" and "Thumb Wheel Steer," in addition to traditional levers and pedals.
- This flexibility ensures smoother, more precise operation, tailored to the operator's preferred style, making every task easier to manage.

Comfortable Seat

• A heated seat with an optional built-in cooling function for ultimate comfort during long shifts.

Digital Key

• A Bluetooth-enabled digital key that lets you unlock the cabin, start the engine, and adjust the air conditioning through the My Develon app, offering effortless machine control from a distance no physical key needed.

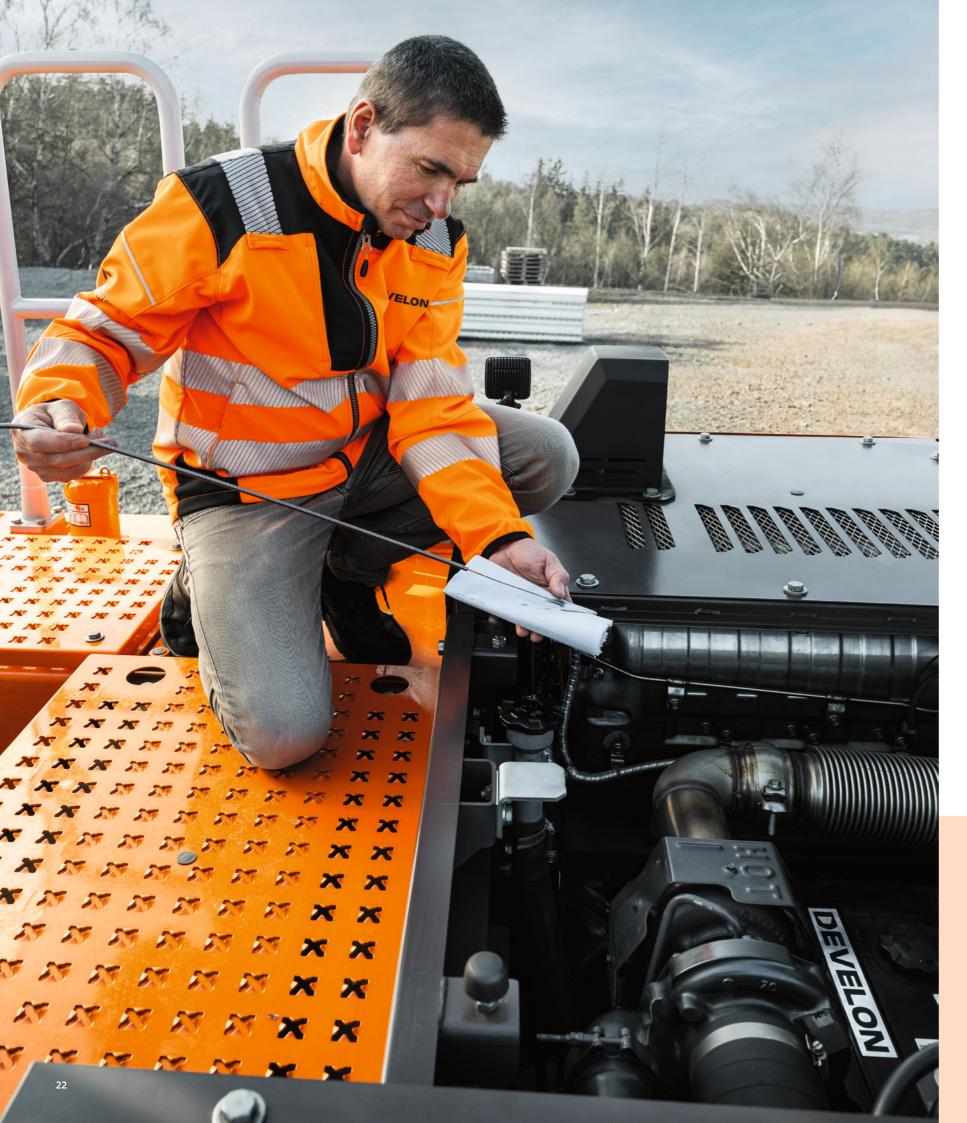

Get More Out of Your Machine

Develon machines are designed for easy maintenance, with extended service intervals and accessible components, helping you save time and money.

Prognostics and Health Management (PHM)

- Develon's latest models feature advanced PHM technology, continuously monitoring critical components like hydraulic oil, engine oil, and main pumps. This smart system predicts maintenance needs, allowing for timely interventions that minimize downtime and lower service costs.
- With remote diagnostics, operators gain real-time insights and faster issue detection, keeping equipment running at peak performance.

Easy Maintenance

- Large guardrails, anti-slip steps, and plates provide safe access to the upper structure.
- The air conditioning filter is easily accessible with a lockable cover, while the battery cut-off switch allows for easy disconnection during long-term storage.

- Engine parts and filters are easy to access for quick maintenance, with shut-off valves to help prevent leaks.
- An electric transfer pump makes priming fuel filters simple, while fine mesh on the side doors and cooler improves cooling and reduces upkeep.
- Greasing points are centralized, and an automatic lubrication system is available for added convenience.

Extended Maintenance Intervals

 Develon sets the standard for extended maintenance intervals, offering engine oil and filter changes at 1 000 hours—twice as long as typical competitors. Hydraulic oil changes can last up to 4 000 hours, minimizing downtime and lowering maintenance costs.

Maintenance Intervals

	DX230LC-9	DX260LC-9
Engine Oil & Filter	1 000 h	
Pre/Main Fuel Filter	1 000 h	
Hydraulic Oil Return Filter	1 000 h	
Air Conditioner Filter	1 000 h	
Air Cleaner Filter	2 000 h	
Engine Coolant	6 000 h	
Hydraulic Oil	4 000 h	
DEF Filter	4 500 h or 3 years	

My Develon Management on the Jobsite
Work Efficiency Management Preventive
Management Proactive Service



Monitor Your Equipment From Anywhere

To compete and succeed, your equipment must maximize jobsite productivity and profitability. Develon machines do both. To ensure a high return on investment, we include more premium features as standard on every model. By making them standard, Develon gives you a competitive edge, helping operators work more efficiently and enhancing safety during long days in the field.

Telematics Terminal

A terminal device is installed and connected to a machine to capture machine data.

Telecommunication

Develon offers dual-mode communication (mobile and satellite) for maximum coverage.

) My Develon

Stay informed with My Develon — the digital platform that consolidates all equipment information and digital services in one place for quick and easy access.

Operation Hours	Total operating hours and hours by mode
Fuel Efficiency*	Fuel levels and consumption
Reports & Location	Operation report and utilization, GPS, and geofencing
Warnings & Alerts	Detect machine warnings, antenna disconnections, and geo/time fence breaches
Filter & Oil Management	Preventive maintenance through scheduled part replacements

Technical Specifications

Engine

Designed to deliver superior performance and best in class fuel efficiency, the Develon DX05V diesel engine fully meets the latest Stage V emission regulations. To optimize machine performance, it features high-pressure fuel injectors, twin turbo chargers with air-to-air intercooler, and electronic engine controls. It also includes a 4-cycle water-cooled system, and common rail direct injection.

Model	Develon DX05V
Number of cylinders	4
Rated power (at 1700 rpm)	141 kW / 189.1 hp (SAE J1995)
Maximum torque (at 1 400 rpm)	97.4 kgf-m
Displacement	5 018 cm ³
Batteries – Alternator	2 × 12 V, 150 Ah - 24 V, 90 A

Undercarriage

Built for durability, the undercarriage features an extremely robust construction made from high-quality materials. All welded structures are designed to minimize stress, ensuring long-lasting performance.

- Track rollers lubricated for life
- Idlers and sprockets fitted with floating seals
- Track shoes made of induction-hardened alloy with triple grouser
- Heat-treated connecting pins
- Hydraulic track adjuster with shock-absorbing tension wheel

Upper rollers	2, shaft
Upper roller diameter	120 mm
Lower rollers	8, single
Lower roller diameter	154 mm
Number of links & shoes per side	49
Link pitch	190 mm
Bushing diameter	59.41 mm
Track gauge	2 390 mm
Tumbler distance	3 650 mm

Track Shoe

Shoe width (mm)	Ground pressure (kgf/cm²)	Machine weight (ton)
Std. 600G	0.50	23.6
Opt. 700G	0.44	23.9
Opt. 800G	0.39	24.2
Opt. 900G	0.34	24.3

Hydraulic System

The new model features a Full Electro Hydraulic (FEH) system that offers precise control through advanced software. Paired with the Edge Cloud Computing (ECC) platform, the system allows for easy remote software updates, keeping it up to date with the latest features. The FEH system collects and analyzes real-time data to optimize efficiency and productivity, making it a smarter, more responsive system in any working condition.

Pumps	Туре	Max. flow rate	Displacement
Main	2 × swash plate, axial piston	2 × 212 l/min	2 × 125 ml/rev

Swing Mechanism

The swing mechanism features an axial piston motor that drives a 2-stage planetary reduction gear, fully immersed in oil for maximum torque.

- Swing bearing: Single-row, shear-type ball bearing with an induction-hardened internal gear
- Internal gear and pinion: Immersed in lubricant for enhanced durability and smooth operation

Swing Motor

Туре	axial piston
Displacement	138.3 ml/rev
Crossover relief valve setting	27.5 MPa
Max. supply flow (at 1750 rpm)	218 l/min
Max. output torque	1 189 kgf.m

Swing Performance

Max. swing speed (EFF=1.00)	10.9 rpm
Act. swing speed (EFF=0.98)	10.7 rpm
Max. swing torque (EFF=1.00)	8 420 kgf.m
Act. swing torque (EFF=0.81)	6 820 kgf.m

Arm

	Length (mm)	Weight (kg)	Digging force (nom. / boost, ton)
Std. arm	2 900	654	(SAE) 10.5 / 11.4, (ISO) 10.8 / 11.7
Short arm	2 400	569	[SAE] 12.2 / 13.2, [ISO] 12.6 / 13.7
Long arm	3 500	796.9	[SAE] 9.4 / 10.2, (ISO) 9.7 / 10.5
SLR arm	6 200	1 059.4	(SAE) 5.9 / 6.4, (ISO) 6.0 / 6.5

Bucket force with standard bucket (nominal pressure / boost, ton)	[SAE] 13.3 / 14.4, [ISO] 15.2 / 16.5
---	--------------------------------------

Cab

The new Develon cabin offers unmatched comfort and productivity, featuring a spacious, ergonomic design with excellent visibility and customizable ambient lighting. A 12.8-inch high-resolution monitor provides easy access to machine functions, with options for split or dual screens. The newly designed joystick allows personalized control for smoother operation, while the comfortable, heated seat includes an optional cooling function.

A-weighted emission sound pressure level at the operator's position, LpAd (ISO 6396:2008)	declared: 68 dB (A) measured: 67 dB (A)
A-weighted sound power level, LwAd (2000/14/EC)	declared: 102 dB (A) measured: 101 dB (A)
Whole body vibration	0.42 m/s ²
Hand arm vibration	0.98 m/s²(L) / 1.04 m/s²(R)

Drive

Each track is powered by an independent, 2-speeds high-torque axial piston motor, coupled with a planetary reduction gearbox for optimal performance. Two levers/ foot pedals ensure smooth travel with counter-rotation on demand. The track frame protects the travel motor, brake, and planetary gears, while the multi-disc track brakes are spring-applied and hydraulically released for reliable stopping power. Machine could be also by a new joysticks steering functionality.

Travel Motor


Туре	axial piston, 2-speed
Displacement	155.4 / 89.8 ml/rev
Crossover relief valve setting	35.8 MPa
Max. supply flow (at 1700 rpm)	212 l/min

Traveling Performance

Traveling speed (EFF=1.00)	3.3 / 5.7 km/h
Traction force (EFF=1.00)	30.7 ton
Traveling speed (EFF=0.98)	3.2 / 5.6 km/h
Traction force (EFF=0.81)	24.87 ton
Gradeability	70 %

Features may vary by region and model 27


DX230LC-9 Dimensions

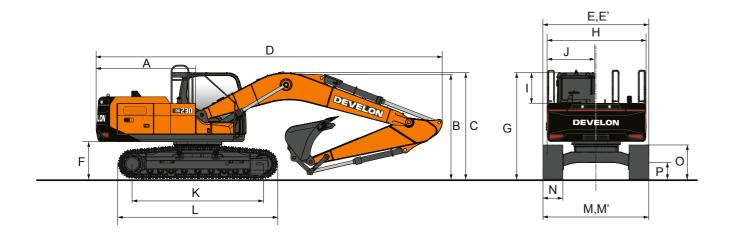

	Unit			Mono boom		SLR boom	Articulat	ted boom			
Boom type	mm			5 700		8 500	5 8	350			
Arm type	mm		2 900	2 400	3 500	6 200	2 400	2 900			
Bucket type (SAE)	m³		0.92	1.05	0.81	0.39	0.92	0.81			
Tail swing radius	mm	А			2 8	355					
Height with cab (boom)	mm	В	2 910	2 975	3 205	3 225	3.0	005			
Shipping height (hose)	mm	С	3 065	3 150	3 390	3 340	3.0	005			
Shipping height with guard rail	mm				3 2	288					
Shipping length	mm	D	9 580	9 610	9 600	12 290	9 770	9 760			
Shipping width (std.)	mm	E/E'		2 990		3 190	2.9	90			
C/Weight clearance	mm	F			109	95.5					
Height over cab.	mm	G			3 '	100					
House width	mm	Н			2	710					
Cab height above house	mm	I			6	08					
Cab width	mm	J		10)13		10	010			
Tumbler distance	mm	К			3 6	550					
Track length	mm	L			4 4	445					
Undercarriage width (std.)	mm	M/M'			2.9	990		3 005 9 770 9 760 2 990 1 010			
Shoe width (std.)	mm	N			6	00	0.92 0.81 3 005 3 005 9 770 9 760 2 990				
Track height	mm	0			*8	183					
Car body clearance	mm	Р			*4	50.5		0.92 0.81 3 005 3 005 9 770 9 760 2 990			

^{*} with grouser

Working Range

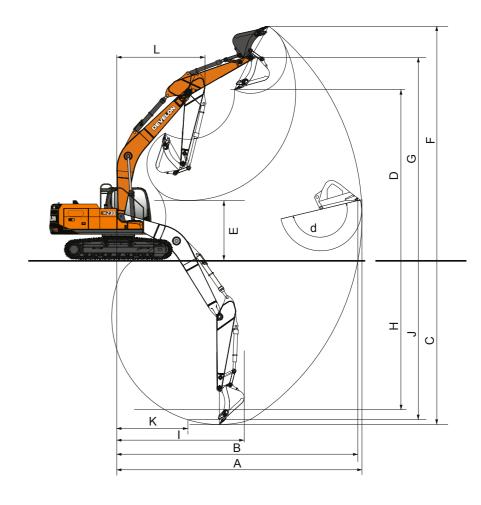

	Unit			Mono boom		SLR boom	Articulat	ed boom
Boom type	mm			5 700		8 500		350
воотт туре	111111			5 /00		0 500	5.0	טכט
Arm type	mm		2 900	2 400	3 500	6 200	2 400	2 900
Bucket type	m³		0.92	1.05	0.81	0.39	0.92	0.81
Max. digging reach	mm	А	9 895	9 475	10 400	15 255	9 725	10 165
Max. digging reach (ground)	mm	В	9 720	9 295	10 235	15 145	9 545	9 995
Max. digging depth	mm	С	6 620	6 115	7 220	11 665	6 020	6 490
Max. loading hieght	mm	D	6 805	6 665	6 950	10 825	8 090	8 420
Min. loading hieght	mm	E	2 465	2 980	1860	1875	3 985	3 380
Max. digging height	mm	F	9 535	9 425	9 735	13 050	11 020	11 335
Max. bucket pin height	mm	G	8 270	8 130	8 415	12 050	9 555	9 885
Max. vertical wall depth	mm	Н	5 790	5 400	6 650	9 725	4 990	5 385
Max. radius vertical	mm	I	6 220	6 030	5 840	9 945	6 355	6 620
Max. depth to 2 500 mm line	mm	J	6 425	5 905	7 045	11 560	5 900	6 380
Min. radius to 2 500 mm line	mm	К	2 825	2 840	2 790	4 695	17	'10
Min. digging reach	mm	L	600	1760	-161	455	-	-
Min. swing radius	mm	M	3 560	3 575	3 615	4 855	2 750	2 620
Bucket angle	deg	d	17	77	176	171	17	77

Lifting Capacities

Mono Boom · W/O Bucket

Unit: 1 000 kg

Α		1.5 m	3.	0 m	4.5	5 m		6.0	m	7	7.5 m		М	lax Reach (n	n)
В	J	G	1	G	-	G	J		<u></u>	I	G	1		G	At

LC Mono Boom 5.70 m · Arm 2.40 m · Shoe 600 mm · Counterweight 4.9 t

7.5 m										6.44*	6.44*	5.62
6 m						6.52*	6.08*			5.90*	4.93*	6.82
4.5 m				8.32*	8.32*	7.02*	5.93*	6.14*	4.20*	5.76*	4.16*	7.55
3 m				10.28*	8.59*	7.86*	5.69*	6.24	4.12*	5.73	3.80*	7.92
1.5 m				11.83*	8.13*	8.52	5.47*	6.13	4.03*	5.58	3.68*	8.00
0 m				12.32*	7.94*	8.37	5.33*	6.06	3.96*	5.75	3.77*	7.79
-1.5 m		11.27*	11.27*	11.88*	7.92*	8.33	5.30*			6.35	4.14*	7.27
-3 m -4.5 m		14.05*	14.05*	10.48*	8.04*	7.69*	5.39*			6.97*	5.02*	6.35
-4.5 m				7.11*	7.11*					6.34*	6.34*	4.82

LC Mono Boom 5.70 m · Arm 2.90 m · Shoe 600 mm · Counterweight 4.9 t

7.5 m							5.36*	5.36*			4.67*	4.67*	6.20
6 m							5.91*	5.91*			4.35*	4.35*	7.31
4.5 m							6.49*	5.96*	6.00*	4.21*	4.29*	3.79*	7.99
3 m					9.48*	8.67*	7.39*	5.70*	6.22*	4.10*	4.40*	3.47*	8.35
1.5 m					11.26*	8.14*	8.28*	5.44*	6.09*	3.98*	4.69*	3.36*	8.42
0 m			6.58*	6.58*	12.11*	7.85*	8.30*	5.26*	5.99*	3.88*	5.22*	3.43*	8.22
-1.5 m	7.19*	7.19*	11.41*	11.41*	12.00*	7.78*	8.22*	5.19*	5.96*	3.86*	5.73*	3.72*	7.73
-3 m	12.30*	12.30*	15.27*	15.24	10.97*	7.85*	8.16*	5.23*			6.70*	4.40*	6.87
-4.5 m			11.66*	11.66*	8.52*	8.09*					6.52*	6.14*	5.49

LC Mono Boom 5.70 m · Arm 2.90 m · Shoe 700 mm · Counterweight 4.9 t

7.5 m							5.36*	5.36*			4.67*	4.67*	6.20
6 m							5.91*	5.91*			4.35*	4.35*	7.31
6 m 4.5 m							6.49*	6.02*	6.00*	4.25*	4.29*	3.83*	7.99
3 m					9.48*	8.76*	7.39*	5.76*	6.29*	4.14*	4.40*	3.51*	8.35
1.5 m					11.26*	8.23*	8.28*	5.50*	6.16*	4.02*	4.69*	3.40*	8.42
0 m			6.58*	6.58*	12.11*	7.94*	8.39*	5.32*	6.06*	3.93*	5.22*	3.47*	8.22
-1.5 m	7.19*	7.19*	11.41*	11.41*	12.00*	7.86*	8.31*	5.25*	6.03*	3.91*	5.79*	3.76*	7.73
-3 m	12.30*	12.30*	15.27*	15.27*	10.97*	7.94*	8.16*	5.29*			6.70*	4.45*	6.87
-4.5 m			11.66*	11.66*	8.52*	8.18*					6.52*	6.21*	5.49

LC Mono Boom 5.70 m · Arm 2.90 m · Shoe 800 mm · Counterweight 4.9 t

7.5 m							5.36*	5.36*			4.67*	4.67*	6.20
6 m							5.91*	5.91*			4.35*	4.35*	7.31
4.5 m							6.49*	6.07*	6.00*	4.30*	4.29*	3.88	7.99
3 m					9.48*	8.85*	7.39*	5.81*	6.36*	4.19*	4.40*	3.55	8.35
1.5 m					11.26*	8.31*	8.28*	5.56*	6.23*	4.07*	4.69*	3.44	8.42
0 m			6.58*	6.58*	12.11*	8.03*	8.49*	5.38*	6.13*	3.97*	5.22*	3.51	8.22
-1.5 m	7.19*	7.19*	11.41*	11.41*	12.00*	7.95*	8.41*	5.31*	6.10*	3.95*	5.86*	3.81	7.73
-3 m	12.30*	12.30*	15.27*	15.27*	10.97*	8.03*	8.16*	5.35*			6.70*	4.50	6.87
-4.5 m			11.66*	11.66*	8.52*	8.27*					6.52*	6.27	5.49

LC Mono Boom 5.70 m · Arm 2.90 m · Shoe 900 mm · Counterweight 4.9 t

7.5 m							5.36*	5.36*			4.67*	4.67*	6.20
6 m							5.91*	5.91*			4.35*	4.35*	7.31
4.5 m							6.49*	6.09*	6.00*	4.31*	4.29*	3.89*	7.99
3 m					9.48*	8.87*	7.39*	5.83*	6.37*	4.20*	4.40*	3.57*	8.35
1.5 m					11.26*	8.34*	8.28*	5.58*	6.25*	4.08*	4.69*	3.45*	8.42
0 m			6.58*	6.58*	12.11*	8.05*	8.52*	5.40*	6.15*	3.99*	5.22*	3.52*	8.22
-1.5 m	7.19*	7.19*	11.41*	11.41*	12.00*	7.98*	8.44*	5.33*	6.12*	3.96*	5.88*	3.82*	7.73
-3 m	12.30*	12.30*	15.27*	15.27*	10.97*	8.05*	8.16*	5.37*			6.70*	4.51*	6.87
-4.5 m			11.66*	11.66*	8.52*	8.29*					6.52*	6.29*	5.49

LC Mono Boom 5.70 m · Arm 3.50 m · Shoe 900 mm · Counterweight 4.9 t

7.5 m											3.93*	3.93*	6.87
6 m									4.72*	4.43*	3.72*	3.72*	7.89
4.5 m							5.87*	5.87*	5.51*	4.36*	3.69*	3.53*	8.52
3 m			12.88*	12.88*	8.53*	8.53*	6.83*	5.90*	5.97*	4.23*	3.79*	3.26*	8.85
1.5 m					10.54*	8.45*	7.84*	5.61*	6.26*	4.08*	4.04*	3.16*	8.92
0 m			7.98*	7.98*	11.78*	8.06*	8.52*	5.39*	6.12*	3.96*	4.48*	3.20*	8.74
-1.5 m	7.04*	7.04*	11.22*	11.22*	12.06*	7.90*	8.38*	5.27*	6.06*	3.90*	5.24*	3.43*	8.27
-3 m	10.94*	10.94*	16.19*	15.33*	11.45*	7.91*	8.38*	5.26*			6.11*	3.94*	7.48
-4.5 m	16.05*	16.05*	13.56*	13.56*	9.68*	8.09*	6.94*	5.41*			6.48*	5.14*	6.24

SLR Boom · W/O Bucket


SLR E	Boom	· W	/O Bu	ıcket																Unit: 1	000 kg
Α	1.5	i m	3.	0 m	4.	5 m	6.0) m	7.	5 m		9.0 m	1	0.5 m	12.	0 m	13.	5 m	Ma	Reach	(m)
В	-	G	-	G	I	G	I		J	G	1		J	G	-	G-	J		J	-	At

LC SLR Boom 8.50 m · Arm 6.20 m · Shoe 800 mm · Counterweight 5.3 t

										0											
12 m																			1.09*	1.09*	9.79
10.5 m													1.69*	1.69*					1.00*	1.00*	11.16
9 m													2.32*	2.32*	1.19*	1.19*			0.95*	0.95*	12.18
7.5 m													2.70*	2.70*	1.98*	1.98*			0.92*	0.92*	12.96
6 m													2.88*	2.76	2.46*	2.15	0.94*	0.94*	0.91*	0.91*	13.52
4.5 m											3.33*	3.33*	3.10*	2.64	2.88*	2.08	1.54*	1.54*	0.93*	0.93*	13.89
3 m					6.93*	6.93*	5.20*	5.20*	4.29*	4.24*	3.73*	3.21	3.36*	2.51	3.10*	1.99	1.91*	1.59	0.96*	0.96*	14.10
1.5 m					8.80*	7.80*	6.22*	5.30*	4.91*	3.90*	4.13*	3.00	3.63*	2.37	3.03	1.90	2.11*	1.54	1.01*	1.01*	14.14
0 m			3.98*	3.98*	7.94*	7.08*	7.04*	4.85*	5.45*	3.61*	4.48	2.81	3.59	2.24	2.94	1.81	2.10*	1.49	1.08*	1.08*	14.02
-1.5 m	3.83*	3.83*	4.83*	4.83*	7.66*	6.74*	7.54*	4.56*	5.58*	3.40*	4.32	2.66	3.48	2.14	2.87	1.75	1.74*	1.45	1.18*	1.18*	13.74
-3 m	4.88*	4.88*	5.88*	5.88*	8.36*	6.63*	7.51*	4.42*	5.44*	3.27*	4.22*	2.56*	3.41	2.07*	2.83*	1.71*			1.32*	1.32*	13.29
-4.5 m	5.98*	5.98*	7.09*	7.09*	9.56*	6.64*	7.46*	4.38*	5.38*	3.22*	4.17*	2.52*	3.38	2.04*	2.82*	1.70*			1.54*	1.54*	12.63
-6 m	7.17*	7.17*	8.48*	8.48*	9.68*	6.76*	7.38*	4.42*	5.40*	3.24*	4.18*	2.53*	3.40	2.06*					1.86*	1.79*	11.75
-7.5 m	8.49*	8.49*	10.13*	10.13*	8.70*	6.96*	6.74*	4.54*	5.40*	3.32*	4.26*	2.60*	2.83*	2.15*					2.44*	2.13*	10.58
-9 m			9.68*	9.68*	720*	720*	5.66*	474*	4 5N*	3.48*	3 44*	2 77*							3 41*	2.76*	9 02

LC SLR Boom 8.50 m · Arm 6.20 m · Shoe 900 mm · Counterweight 5.3 t

12 m																			1.09*	1.09*	9.79
10.5 m													1.69*	1.69*					1.00*	1.00*	11.16
9 m													2.32*	2.32*	1.19*	1.19*			0.95*	0.95*	12.18
7.5 m													2.70*	2.70*	1.98*	1.98*			0.92*	0.92*	12.96
6 m													2.88*	2.77	2.46*	2.16	0.94*	0.94*	0.91*	0.91*	13.52
4.5 m											3.33*	3.33*	3.10*	2.65	2.88*	2.08	1.54*	1.54*	0.93*	0.93*	13.89
3 m					6.93*	6.93*	5.20*	5.20*	4.29*	4.25*	3.73*	3.22	3.36*	2.51	3.10*	2.00	1.91*	1.60	0.96*	0.96*	14.10
1.5 m					8.80*	7.82*	6.22*	5.32*	4.91*	3.91*	4.13*	3.01	3.63*	2.37	3.04	1.91	2.11*	1.54	1.01*	1.01*	14.14
0 m			3.98*	3.98*	7.94*	7.10*	7.04*	4.87*	5.45*	3.62*	4.50*	2.82	3.60	2.25	2.96	1.82	2.10*	1.49	1.08*	1.08*	14.02
-1.5 m	3.83*	3.83*	4.83*	4.83*	7.66*	6.76*	7.54*	4.58*	5.60	3.41*	4.34	2.67	3.49	2.15	2.89	1.76	1.74*	1.46	1.18*	1.18*	13.74
-3 m	4.88*	4.88*	5.88*	5.88*	8.36*	6.65*	7.54*	4.44*	5.46*	3.29*	4.24*	2.57*	3.42*	2.08*	2.84*	1.72*			1.32*	1.32*	13.29
-4.5 m	5.98*	5.98*	7.09*	7.09*	9.56*	6.67*	7.49*	4.40*	5.40*	3.24*	4.19*	2.53*	3.39*	2.05*	2.84*	1.71*			1.54*	1.54*	12.63
-6 m	7.17*	7.17*	8.48*	8.48*	9.68*	6.78*	7.38*	4.44*	5.42*	3.25*	4.20*	2.54*	3.41*	2.07*					1.86*	1.80*	11.75
-7.5 m	8.49*	8.49*	10.13*	10.13*	8.70*	6.98*	6.74*	4.55*	5.40*	3.33*	4.28*	2.61*	2.83*	2.16*					2.44*	2.14*	10.58
-9 m			9.68*	9.68*	7.20*	7.20*	5.66*	4.76*	4.50*	3.50*	3.44*	2.78*							3.41*	2.77*	9.02

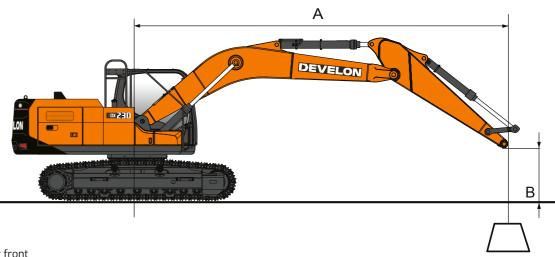

= Rating over front

□ = Rating over side or 360°

- 1. At the arm end, without bucket (unit: 1000 kg)
- 2. Capacities marked with an asterisk (*) are limited by hydraulic capacities.
- 3. Lift capacities shown do not exceed 75 % of minimun tipping loads or 87 % of hydraulic capacities.
- 4. The least stable position is over the side.
- 5. Lift capacities are based on the machine's original design and standard equipment from the manufacturer.
- 6. Lift capacities are in compliance with ISO 10567.
- 7. Machine in "power boost" mode for lifting capacities.

Technical Specifications

Engine

Designed to deliver superior performance and best in class fuel efficiency, the Develon DX05V diesel engine fully meets the latest Stage V emission regulations. To optimize machine performance, it features high-pressure fuel injectors, twin turbo chargers with air-to-air intercooler, and electronic engine controls. It also includes a 4-cycle water-cooled system, and common rail direct injection.

Model	Develon DX05V		
Number of cylinders	4		
Rated power (at 1 900 rpm)	171.1 kW / 229.4 hp (SAE J1995)		
Maximum torque (at 1 400 rpm)	97.4 kgf-m		
Displacement	5 018 cm ³		
Batteries – Alternator	2 × 12 V, 150 Ah - 24 V, 100 A		

Undercarriage

Built for durability, the undercarriage features an extremely robust construction made from high-quality materials. All welded structures are designed to minimize stress, ensuring long-lasting performance.

- Track rollers lubricated for life
- Idlers and sprockets fitted with floating seals
- Track shoes made of induction-hardened alloy with triple grouser
- Heat-treated connecting pins
- Hydraulic track adjuster with shock-absorbing tension wheel

Upper rollers	2, shaft		
Upper roller diameter	142 mm		
Lower rollers	9, single		
Lower roller diameter	160 mm		
Number of links & shoes per side	51		
Pin diameter	38 mm		
Link pitch	190 mm		
Bushing diameter	59.41 mm		
Track gauge std. / narrow	2 600 / 2 400 mm		
Tumbler distance	3 835		

Track Shoe

Shoe width (mm)	Ground pressure (kgf/cm²)	Machine weight (ton)	
Std. 600G	0.53	26.8	
Opt. 700G	0.46	27.1	
Opt. 800G	0.41	27.4	
Opt. 900G	0.37	27.7	

Hydraulic System

The new model features a Full Electro Hydraulic (FEH) system that offers precise control through advanced software. Paired with the Edge Cloud Computing (ECC) platform, the system allows for easy remote software updates, keeping it up to date with the latest features. The FEH system collects and analyzes real-time data to optimize efficiency and productivity, making it a smarter, more responsive system in any working condition.

Pumps	Туре	Max. flow rate	Displacement
Main	2 × swash plate, axial piston	2 × 237.5 l/min	2 × 125 ml/rev

Swing Mechanism

The swing mechanism features an axial piston motor that drives a 2-stage planetary reduction gear, fully immersed in oil for maximum torque.

- Swing bearing: Single-row, shear-type ball bearing with an induction-hardened internal gear
- Internal gear and pinion: Immersed in lubricant for enhanced durability and smooth operation

Swing Motor

Туре	axial piston		
Displacement	142.8 ml/rev		
Crossover relief valve setting	28 MPa		
Max. supply flow (at 1950 rpm)	243.7 l/min		
Max. output torque	1754 kgf.m		

Swing Performance

Max. swing speed (EFF=1.00)	10.6 rpm		
Act. swing speed (EFF=0.98)	10.4 rpm		
Max. swing torque (EFF=1.00)	10 275 kgf.m		
Act. swing torque (EFF=0.81)	8 323 kgf.m		

Arm

	Length (mm)	Weight (kg)	Digging force (nom. / boost, ton)
Std. arm	3 000	789	(SAE) 12.6 / 13.7, (ISO) 13.1 / 14.2
Short arm	2 500	680	(SAE) 15.2 / 16.5, (ISO) 15.9 / 17.2
Long arm	3 500	894	(SAE) 11.6 / 12.6, (ISO) 12.0 / 13.1

Bucket force with standard bucket	(SAE) 15.6/16.9,
(nominal pressure / boost, ton)	(ISO) 18.2/19.8

Cab

The new Develon cabin offers unmatched comfort and productivity, featuring a spacious, ergonomic design with excellent visibility and customizable ambient lighting. A 12.8-inch high-resolution monitor provides easy access to machine functions, with options for split or dual screens. The newly designed joystick allows personalized control for smoother operation, while the comfortable, heated seat includes an optional cooling function.

A-weighted emission sound pressure level at the operator's position, LpAd (ISO 6396:2008)	declared: 70 dB (A) measured: 69 dB (A)
A-weighted sound power level, LwAd (2000/14/EC)	declared: 103 dB (A) measured: 102 dB (A)
Whole body vibration	0.45 m/s ²
Hand arm vibration	0.78 m/s ² (L) / 0.66 m/s ² (R)

Drive

Each track is powered by an independent, 2-speeds high-torque axial piston motor, coupled with a planetary reduction gearbox for optimal performance. Two levers/ foot pedals ensure smooth travel with counter-rotation on demand. The track frame protects the travel motor, brake, and planetary gears, while the multi-disc track brakes are spring-applied and hydraulically released for reliable stopping power. Machine could be also by a new joysticks steering functionality.

Travel Motor


Туре	axial piston, 2-speed			
Displacement	155.4 / 89.8 ml/rev			
Crossover relief valve setting	35.8 MPa			
Max. supply flow (at 1850 rpm)	237.5 l/min			

Traveling Performance

Traveling speed (EFF=1.00)	3.5 / 6.0 km/h
Traction force (EFF=1.00)	30.7 / 17.8 ton
Traveling speed (EFF=0.98)	3.4 / 5.9 km/hr
Traction force (EFF=0.81/0.65)	24.9 / 10.6 ton
Greadeability	70 %


32 Features may vary by region and model **33**

DX260LC-9 Dimensions

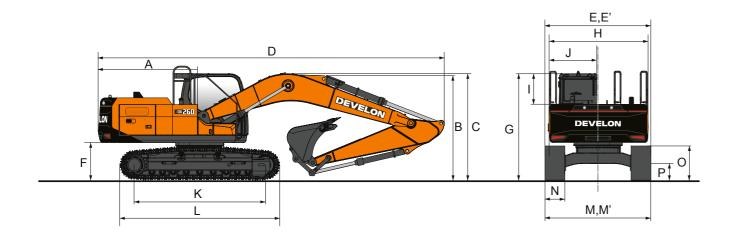

	Unit			Mono boom	1	Art	ticulated bo	om
Boom type	mm			5 900			6 090	
Arm type	mm		3 000	2 500	3 500	3 000	2 500	3 500
Bucket type (SAE)	m³		1.10	1.17	0.92	1.10	1.17	0.92
Tail swing radius	mm	Α			3 (040		
Shipping height (boom)	mm	В	3 016	3 080	3 379	3 113	3 094	3 459
Shipping height (hose)	mm	С	3 237	3 344	3 597	3 113	3 094	3 507
Shipping height with guard rail	mm				3 3	304		
Shipping length	mm	D	10 085	10 145	10 110	10 265	10 290	10 195
Shipping width (std.)	mm	E/E'			3 2	200		
Shipping width (narrow)	mm	E/E"			3 0	000		
C/Weight clearance	mm	F			11	11.5		
Height over cab	mm	G			3	121		
Height over cab (without roof)	mm				3 (D91		
House width	mm	Н	2 710					
Cab height above house	mm	I			6.	24		
Cab width	mm	J			10	010		
Tumbler distance	mm	К			3 8	335		
Track length	mm	L			4 6	530		
Undercarriage width (std.)	mm	M/M'			3 2	200		
Undercarriage width (narrow)	mm	M/M'			3 0	000		
Shoe width (std.)	mm	N/N'			61	00		
Shoe width (narrow)	mm	N/N'			61	00		
Track height	mm	0			*9	40		
Car body clearance	mm	Р			*4	24		

Working Range

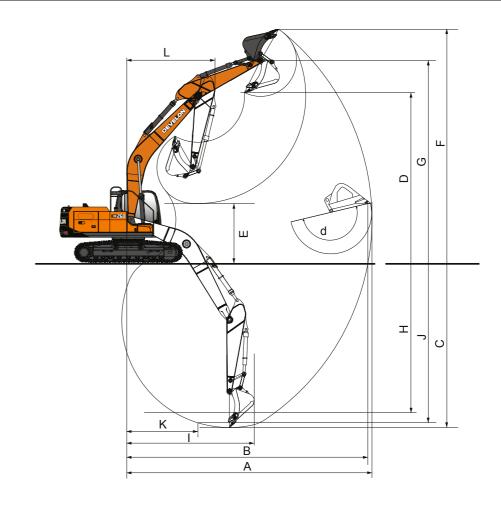

	Unit			Mono boom		Ar	ticulated boo	om
Boom type	mm			5 900			6 090	
Arm type	mm		3 000	2 500	3 500	3 000	2 500	3 500
Bucket type (SAE)	m³		1.	17	1.05	1.	17	1.05
Max. digging reach	mm	А	10 170	9 645	10 600	10 480	9 950	10 930
Max. digging reach (ground)	mm	В	9 990	9 450	10 430	10 305	9 760	10 760
Max. digging depth	mm	С	6 810	6 305	7 310	6 730	6 205	7 205
Max. loading hieght	mm	D	7 025	6 650	7 170	8 685	8 155	8 960
Min. loading hieght	mm	E	2 600	3 105	2 090	3 500	4 100	3 095
Max. digging height	mm	F	9 770	9 355	9 890	11 580	11 060	11 875
Max. bucket pin height	mm	G	8 490	8 120	8 640	10 115	9 620	10 430
Max. vertical wall depth	mm	Н	5 935	5 190	6 275	5 655	5 055	6 075
Max. vertical radius	mm	I	6 375	6 460	6 640	6 615	6 625	6 835
Max. depth to 2 500 mm line	mm	J	6 615	6 040	7 135	6 625	6 090	7 105
Min. radius to 2 500 mm line	mm	К	2 925	2 845	2 910		1675	
Min. digging reach	mm	L	690	1870	195	-	-	-
Min. swing radius	mm	М	3 715	3 730	3 755	2 940	3 080	3 280
Bucket angle	deg	d	174	174	175	17	74	175

Lifting Capacities

Mono Boom · W/O Bucket

Unit: 1 000 kg

Α	1.5	m	3.0) m	4.5	i m	6.0) m	7.5	m	9.0) m	Ma	ax Reach (m)
В	J	G	<u> </u>	G	-	G	J	G	J	G	J		J	G	At

LC Mono Boom 5.90 m · Arm 3.0 m · Shoe 600 mm · Counterweight 5.5 t

7.5 m							6.60*	6.60*				5.26*	5.26*	6.66
6 m							6.75*	6.75*	5.91*	5.31		4.99*	4.99*	7.68
4.5 m					8.87*	8.87*	7.53*	7.38	6.87*	5.23		4.95*	4.43	8.32
3 m					11.27*	10.77*	8.65*	7.05	7.39*	5.08		5.11*	4.10	8.64
1.5 m					13.31*	10.14*	9.72*	6.74	7.31	4.93		5.46*	3.99	8.69
0 m			7.56*	7.56*	14.23*	9.82*	9.99	6.53	7.18	4.81		6.03	4.07	8.48
-1.5 m	8.67*	8.67*	13.13*	13.13*	14.09*	9.74*	9.89	6.44	7.14	4.77		6.55	4.41	7.98
-3 m	14.38*	14.38*	18.00*	18.00*	12.97*	9.82*	9.73*	6.49				7.69*	5.17	7.14
-4.5 m			1417*	14 17*	1∩ ∆1*	10 08*						761*	704	5.80

NLC Mono Boom 5.90 m · Arm 3.0 m · Shoe 600 mm · Counterweight 5.5 t

7.5 m							6.60*	6.60*				5.26*	5.26*	6.66
6 m							6.75*	6.75*	5.91*	4.90		4.99*	4.70	7.68
6 m 4.5 m					8.87*	8.87*	7.53*	6.79	6.87*	4.83		4.95*	4.08	8.32
3 m					11.27*	9.81	8.65*	6.47	7.39*	4.68		5.11*	3.77	8.64
1.5 m					13.31*	9.20	9.72*	6.17	7.28	4.53		5.46*	3.66	8.69
0 m			7.56*	7.56*	14.23*	8.89	9.96	5.97	7.16	4.41		6.01	3.74	8.48
-1.5 m	8.67*	8.67*	13.13*	13.13*	14.09*	8.81	9.86	5.88	7.12	4.37		6.53	4.04	7.98
-3 m	14.38*	14.38*	18.00*	17.28*	12.97*	8.89	9.73*	5.92				7.69*	4.74	7.14
-4.5 m			14.12*	14.12*	10.41*	9.14						7.61*	6.44	5.80

LC Mono Boom 5.90 m · Arm 3.50 m · Shoe 600 mm · Counterweight 5.5 t

7.5 m													4.71*	4.71*	7.21
6 m									6.09*	5.39			4.52*	4.52*	8.17
6 m 4.5 m							6.98*	6.98*	6.44*	5.29			4.52*	4.10	8.76
3 m					10.41*	10.41*	8.16*	7.16	7.03*	5.13	5.10*	3.86	4.68*	3.81	9.07
1.5 m					12.68*	10.3*	9.34*	6.81	7.34	4.95	5.58	3.79	5.00*	3.71	9.12
0 m			8.75*	8.75*	13.97*	9.87*	10.03	6.56	7.19	4.81			5.55*	3.78	8.92
-1.5 m	8.33*	8.33*	12.86*	12.86*	14.20*	9.71*	9.89	6.43	7.11	4.74			6.01	4.05	8.45
-3 m	13.02*	13.02*	18.76*	18.76*	13.46*	9.74*	9.89	6.43	7.14	4.77			6.94	4.65	7.66
-45 m	19 ∩7*	19 ∩7*	15 95*	15 95*	11 49*	9.95*	8.40*	6.58					751*	6.02	6.43

NLC Mono Boom 5.90 m · Arm 3.50 m · Shoe 600 mm · Counterweight 5.5 t

7.5 m													4.71*	4.71*	7.21
6 m									6.09*	4.98			4.52*	4.29	8.17
4.5 m							6.98*	6.91	6.44*	4.88			4.52*	3.77	8.76
3 m					10.41*	10.06	8.16*	6.58	7.03*	4.72	5.10*	3.55	4.68*	3.50	9.07
1.5 m					12.68*	9.36	9.34*	6.24	7.32	4.55	5.57	3.48	5.00*	3.41	9.12
0 m			8.75*	8.75*	13.97*	8.94	10.00	5.99	7.17	4.41			5.55*	3.46	8.92
-1.5 m	8.33*	8.33*	12.86*	12.86*	14.20*	8.78	9.86	5.87	7.09	4.34			5.99	3.71	8.45
-3 m	13.02*	13.02*	18.76*	17.08*	13.46*	8.81	9.86	5.86	7.12	4.37			6.92	4.26	7.66
-4.5 m	19.07*	19.07*	15.95*	15.95*	11.49*	9.01	8.40*	6.02					7.51*	5.51	6.43

Articulated Boom · W/O Bucket

Unit: 1 000 kg


Α	3.0) m	4.5	5 m	6.0) m	7.5	m	9.0) m	М	ax Reach (n	n)
В	J	G	J	C	J	C	-	C	J	C	J	F	At

LC Articulated Boom 6.09 m \cdot Arm 3.0 m \cdot Shoe 600 mm \cdot Counterweight 5.5 t

9 m			7.67*	7.67*							5.66*	5.66*	5.53
7.5 m					7.27*	7.27*					4.89*	4.89*	7.06
6 m			7.50*	7.50*	7.89*	7.55*	6.74*	5.23*			4.58*	4.58*	8.03
4.5 m			11.31*	11.31*	8.99*	7.25*	7.03*	5.12*			4.49*	4.04*	8.64
3 m			13.04*	10.49*	9.75*	6.87*	7.39*	4.94*			4.56*	3.75*	8.95
1.5 m			13.98*	9.80*	10.08*	6.53*	7.19*	4.76*	4.84*	3.66*	4.79*	3.66*	9.00
0 m			13.61*	9.49*	9.83*	6.31*	7.06*	4.64*			5.22*	3.74*	8.80
-1.5 m	10.12*	10.12*	12.17*	9.45*	9.39*	6.23*	7.02*	4.61*			5.79*	4.04*	8.32
-3 m			9.72*	9.58*	7.61*	6.30*	5.05*	4.72*			4.99*	4.70*	7.52

NLC Articulated Boom 6.09 m · Arm 3.0 m · Shoe 600 mm · Counterweight 5.5 t

9 m 7.67* 7.5 m 6 m 7.50* 4.5 m 11.31*	7.67* 7.50* 10.37*	7.27* 7.89*	7.06* 6.95*	6.74*	/ 012			5.66* 4.89*	5.66* 4.89*	5.53 7.06
6 m 7.50*	_	7.89*		6.7//*	(01*			4.89*	4.89*	7.06
	_		6.95*	6.7/i*	(O1÷					
/ 5 m 11 21*	10 37*			0.74	4.81*			4.58*	4.24*	8.03
4.5 111 11.51	10.57	8.99*	6.66*	7.03*	4.70*			4.49*	3.70*	8.64
3 m 13.04*	9.52*	9.75*	6.28*	7.36*	4.53*			4.56*	3.43*	8.95
1.5 m 13.98*	8.85*	10.05*	5.95*	7.17*	4.35*	4.84*	3.34*	4.79*	3.34*	9.00
0 m 13.61*	8.55*	9.80*	5.73*	7.04*	4.23*			5.22*	3.41*	8.80
-1.5 m 10.12* 10.12* 12.17*	8.51*	9.39*	5.66*	7.00*	4.20*			5.79*	3.69*	8.32
-3 m 9.72*	8.63*	7.61*	5.72*	5.05*	4.31*			4.99*	4.3*	7.52

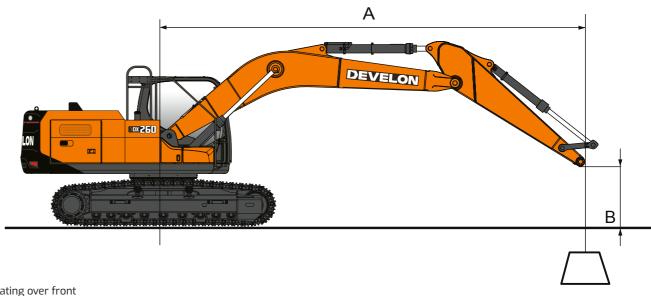

= Rating over front

= Rating over side or 360°

- 1. At the arm end, without bucket (unit: 1000 kg)
- 2. Capacities marked with an asterisk (*) are limited by hydraulic capacities.
- 3. Lift capacities shown do not exceed 75 % of minimun tipping loads or 87 % of hydraulic capacities.
- 4. The least stable position is over the side.
- 5. Lift capacities are based on the machine's original design and standard equipment from the manufacturer.
- 6. Lift capacities are in compliance with ISO 10567.
- 7. Machine in "power boost" mode for lifting capacities.

36 37



Develon Warranty

Your Key to Equipment Protection and Peace of Mind

Keep your heavy construction equipment protected with Develon. Our comprehensive warranties and premium protection plans give you peace of mind, ensuring your investment stays safe and valuable for the road ahead.

Tailored Warranty Plans

Choose from a range of affordable protection plans, designed exclusively for Develon customers through our authorized dealers. These plans transform your machine's price into a strategic investment, not just an expense.

Develon Premium Protection

Opt for Develon Premium to experience unmatched security, reliability, and overall value. This top-tier plan shields your equipment from unexpected costs and minimizes downtime, letting you focus on what matters – getting the job done.

Act Now

Get in touch with a Develon authorized dealer today to protect your equipment investment. With an easy process and lasting benefits, Develon helps keep your heavy construction equipment in top condition.

Choose Develon Extended Warranty: Play it Safe and Protect Your Investment.

Powered by **Innovation**

HD Hyundai Infracore Europe s.r.o. IBC – Pobrezni 620/3, 18600 Praha 8 – Karlin, Czechia

DEVELON

©2025 HD Hyundai Infracore. All rights reserved.

D4600894 (04/2025)